




RZR XP 900/1000 Premium Horn Kit With Carling Switch

Thank you for purchasing XTC Power Products Horn Kit.

Please read the instructions fully and familiarize yourself with the components before starting the install.

1. Remove hood, dash cover.
2. Install the included horn bracket onto the horn. Remove the Torx screw that holds the body and mount the horn, you will need to bend the bracket to get under hood. Attach the purple wire to the horn terminal.

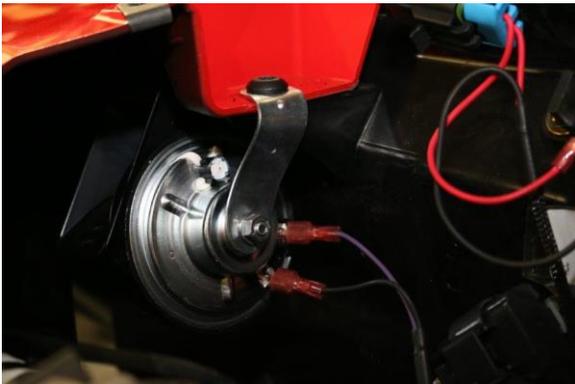

3. Connect the Black wire to the other horn terminal and ground. Remove one of the bolts attached to the frame and install the ground wire under it. It can also be hooked to the ground on the factory Busbar if the Busbar has a Battery Ground Cable.



4. Run the Red and Purple wire through rubber grommet on fire wall to the dash.

WARNING! Verify that there is clearance behind dash for switch.

- Using a new box knife or sharp tool cut out one of the switch rectangles. NOTE: We have included a switch cutout template in case you want to mount it elsewhere or do not have OEM Cutout positions. Push the switch wires through, attach to switch and install in dash.




- Run the red power wire to 12vdc accessory stud under the hood, it can also be hooked up to constant power.

Older Style RZR Busbar



Newer RZR Busbar's have Battery and Ground attached.

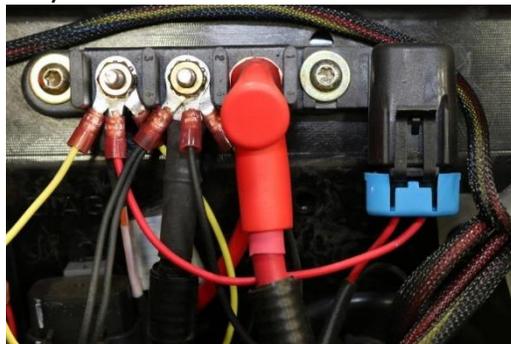

- Verify operation of Horn. Cable tie any extra harness under dash and hood.

For more details on installation go to www.xtcinstall.com. We can also be reached at Support@xtcpowerproducts.com. Please visit our website at www.xtcpowerproducts.com

XTC Power Products
A Division of XTC Motorsports LLC
925 N McQueen RD. #101
Gilbert AZ 85233
480-558-8588
R2
www.xtcpowerproducts.com
Copyright © 2019 XTC Motorsports LLC, All Rights Reserved