

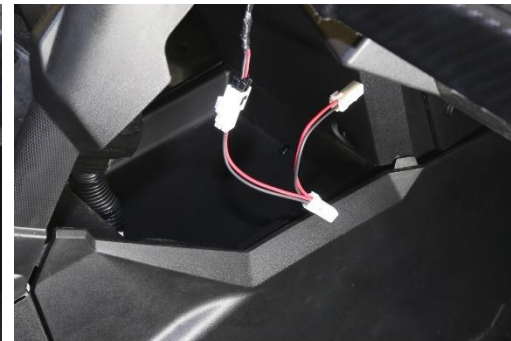
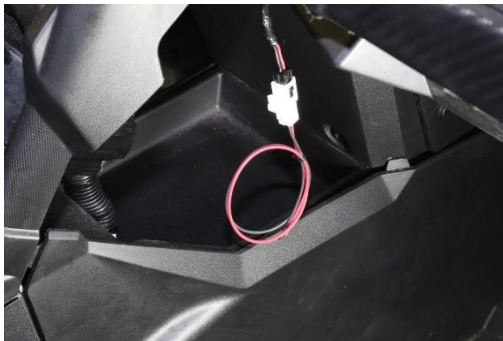


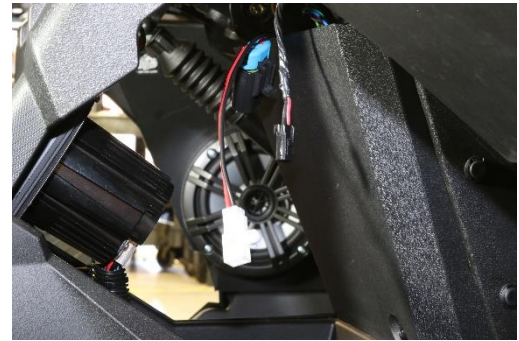

CAN-AM Accessory Power Adapters

Thank you for purchasing XTC's Under Dash Accessory Power Adapter. Please read the instructions fully and familiarize yourself with the components before starting the install. XTC Currently offers 3 adapters, 12" Pig Tail, 12" Fused Pig Tail and a Y Adapter. These are basic instructions for all three.

1. Remove the plastic center cover under the dash exposing the main wire harness.
2. Cut the cable tie and that holds the AUX Plug to make it simpler to use, the connector maybe in the back of the harness hidden, un-plug the OEM accessory port cover (White Plug) by pushing the center button.
3. Plug in the adapter. Re-install center plastic Cover.

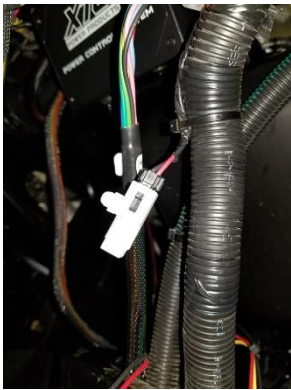

4. Attach the adapter to the device to be powered. Make sure every device installed on the accessory plug has its own in line fuse or circuit protection.
5. Plug the adapter into the port. The accessory port shares the same fuse as the Dash DC Outlet, it is in Fuse Block position F12 and is a 20 Amp Fuse.

WARNING! Do not exceed the overall power out of the of the DC Outlet Circuit, 20 Amps.

For more details on installation go to www.xtcinstall.com

We can also be reached by email at support@powerproducts.com

To purchase Accessories please visit our web site at www.xtcpowerproducts.com

Copyright © 2018 XTC MOTORSPORTS LLC, all rights reserved.

XTC Power Products

A Division of XTC Motorsports LLC

925 N McQueen RD. #101

Gilbert AZ 85233

480-558-8588

www.xtcpowerproducts.com